


**LP SERIES****STANDARD KNOCK-DOWN STRIP FOR LIMITED SPACE AREAS**

- Ideal for flush or row mounting
- Pre-finished 23 ga steel in a baked white enamel
- UL listed for dry locations



Dimensions subject to change, inquire at factory for latest data

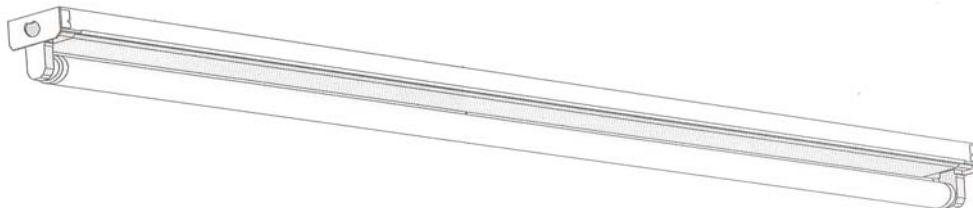

ENERGY SAVING FLUORESCENT FIXTURES T12 MAGNETIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
LP115I	1LT	F15T12	PRE-HEAT	18IN	2-7/8IN	1-7/8IN
LP120I	1LT	F20T12	PRE-HEAT	24IN	2-7/8IN	1-7/8IN
LP130RL	1LT	F30T12	RAPID START	36IN	2-7/8IN	1-7/8IN
LP130HR	1LT	F30T12	RAPID START	36IN	2-7/8IN	1-7/8IN
LP134RL	1LT	F34T12	RAPID START	48IN	2-7/8IN	1-7/8IN
LP134HR	1LT	F34T12	RAPID START	48IN	2-7/8IN	1-7/8IN
LP130-2R	1LT TANDEM	F30T12	RAPID START	72IN	2-7/8IN	1-7/8IN
LP134-2R	1LT TANDEM	F34T12	RAPID START	96IN	2-7/8IN	1-7/8IN

ENERGY SAVING FLUORESCENT FIXTURES T8 ELECTRONIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
E-LP117	1LT	F17T8	INSTANT START	24IN	2-7/8IN	1-7/8IN
E-LP125	1LT	F25T8	INSTANT START	36IN	2-7/8IN	1-7/8IN
E-LP132	1LT	F32T8	INSTANT START	48IN	2-7/8IN	1-7/8IN
E-LP125-2	1LT TANDEM	F25T8	INSTANT START	72IN	2-7/8IN	1-7/8IN
E-LP132-2	1LT TANDEM	F32T8	INSTANT START	96IN	2-7/8IN	1-7/8IN

**AVAILABLE ADDERS/OPTIONS (Some may be special order, please inquire at factory)**

- 20 ga steel with pivot ends (add suffix **-PE20**)
- 277 volt
- Chrome reflector (8ft requires two 4ft sections)
- Cord & plug (2 or 3 wire)
- Dimming ballast
- Emergency back-up
- Pre-heat with starters available for T12 MAG only (omit lettering at end of item code)
- Pull chain switch
- Stems (3/8in diameter)
- Zero degree ballast



**APOLLO LIGHTING**  
212 SOUTH 12th AVENUE  
MOUNT VERNON, NEW YORK 10550  
914-664-3600 Phone 914-664-6091 Fax