

LSS SERIES



STANDARD WELDED STAGGERED STRIP

- Ideal for flush, stem or row mounting
- Pre-finished 22 ga steel in a baked white enamel
- UL listed for dry locations

STAGGERED STRIP SERIES

1 Lite
1 Lite Tandem

STAGGERED STRIP SERIES

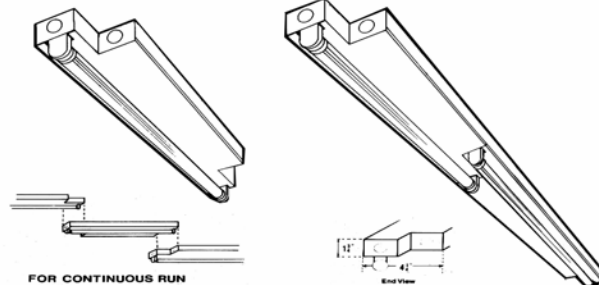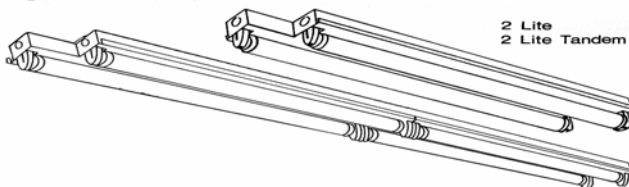

Dimensions subject to change, inquire at factory for latest data



ENERGY SAVING FLUORESCENT FIXTURES T12 MEDIUM BI-PIN MAGNETIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
LSS115I	1LT	F15T12 (or T8)	PRE-HEAT	20-15/16IN	4-1/4IN	1-3/4IN
LSS120I	1LT	F20T12	PRE-HEAT	26-15/16IN	4-1/4IN	1-3/4IN
LSS130HR	1LT	F30T12	RAPID START	38-15/16IN	4-1/4IN	1-3/4IN
LSS130RL	1LT	F30T12	RAPID START	38-15/16IN	4-1/4IN	1-3/4IN
LSS134HR	1LT	F34T12	RAPID START	50-15/16IN	4-1/4IN	1-3/4IN
LSS134RL	1LT	F34T12	RAPID START	50-15/16IN	4-1/4IN	1-3/4IN
LSS130-2R	1LT TANDEM	F30T12	RAPID START	74-15/16IN	4-1/4IN	1-3/4IN
LSS134-2R	1LT TANDEM	F34T12	RAPID START	98-15/16IN	4-1/4IN	1-3/4IN
LSS215I	2LT	F15T12 (or T8)	PRE-HEAT	20-15/16IN	4-1/4IN	1-3/4IN
LSS220I	2LT	F20T12	PRE-HEAT	26-15/16IN	4-1/4IN	1-3/4IN
LSS230R	2LT	F30T12	RAPID START	38-15/16IN	4-1/4IN	1-3/4IN
LSS234R	2LT	F34T12	RAPID START	50-15/16IN	4-1/4IN	1-3/4IN
LSS2230R	2LT TANDEM	F30T12	RAPID START	74-15/16IN	4-1/4IN	1-3/4IN
LSS2234R	2LT TANDEM	F34T12	RAPID START	98-15/16IN	4-1/4IN	1-3/4IN

ENERGY SAVING FLUORESCENT FIXTURES T8 MEDIUM BI-PIN ELECTRONIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
E-LSS117	1LT	F17T8	INSTANT START	26-15/16IN	4-1/4IN	1-3/4IN
E-LSS125	1LT	F25T8	INSTANT START	38-15/16IN	4-1/4IN	1-3/4IN
E-LSS132	1LT	F32T8	INSTANT START	50-15/16IN	4-1/4IN	1-3/4IN
E-LSS125-2	1LT TANDEM	F25T8	INSTANT START	74-15/16IN	4-1/4IN	1-3/4IN
E-LSS132-2	1LT TANDEM	F32T8	INSTANT START	98-15/16IN	4-1/4IN	1-3/4IN
E-LSS217	2LT	F17T8	INSTANT START	26-15/16IN	4-1/4IN	1-3/4IN
E-LSS225	2LT	F25T8	INSTANT START	38-15/16IN	4-1/4IN	1-3/4IN
E-LSS232	2LT	F32T8	INSTANT START	50-15/16IN	4-1/4IN	1-3/4IN
E-LSS2225	2LT TANDEM	F25T8	INSTANT START	74-15/16IN	4-1/4IN	1-3/4IN
E-LSS2232	2LT TANDEM	F32T8	INSTANT START	98-15/16IN	4-1/4IN	1-3/4IN

AVAILABLE ADDERS/OPTIONS (Some may be special order, please inquire at factory)

- 277 volt
- Cord & plug (2 or 3 wire)
- Dimming ballast
- Emergency back-up
- Pull chain switch
- Stems (3/8in diameter)
- Welded 20 ga body available for limited sizes only (add suffix -S)
- Zero degree ballast



APOLLO LIGHTING
212 SOUTH 12th AVENUE
MOUNT VERNON, NEW YORK 10550
914-664-3600 Phone 914-664-6091 Fax