


LW SERIES**WELDED COMMERCIAL STRIP**

- Ideal for flush, stem or row mounting
- Post-finished welded steel in a baked white enamel
- UL listed for dry locations



Dimensions subject to change, inquire at factory for latest data

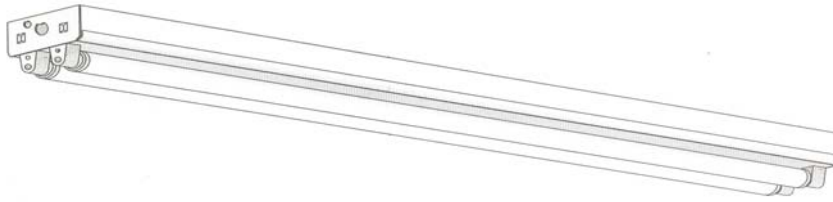

| ENERGY SAVING FLUORESCENT FIXTURES T12 MAGNETIC | | | | | | |
|--|-----|-----------|---------------|------------|---------|---------|
| MODEL NO. | QTY | LAMP TYPE | | DIMENSIONS | | |
| | | | | L | W | D |
| *LW148 | 1LT | F48T12 | INSTANT START | 48IN | 3-7/8IN | 3-1/8IN |
| *LW172 | 1LT | F72T12 | INSTANT START | 72IN | 3-7/8IN | 3-1/8IN |
| *LW196 | 1LT | F96T12 | INSTANT START | 96IN | 3-7/8IN | 3-1/8IN |
| *LW248 | 2LT | F48T12 | INSTANT START | 48IN | 5IN | 3-1/8IN |
| *LW272 | 2LT | F72T12 | INSTANT START | 72IN | 5IN | 3-1/8IN |
| *LW296 | 2LT | F96T12 | INSTANT START | 96IN | 5IN | 3-1/8IN |
| *LW496 | 4LT | F96T12 | INSTANT START | 96IN | 10IN | 3-1/8IN |

*Available in T12 MAG HO (EX: LW272HO), T8 ELE HO (EX: LW272HO-T8), T12 ELE HO (EX: E-LW272HO-T12)

| ENERGY SAVING FLUORESCENT FIXTURES T12 MAGNETIC BI-PIN | | | | | | |
|---|------------|-----------|-------------|------------|---------|---------|
| MODEL NO. | QTY | LAMP TYPE | | DIMENSIONS | | |
| | | | | L | W | D |
| LW120I | 1LT | F20T12 | PRE-HEAT | 24IN | 2-5/8IN | 1-3/4IN |
| LW130HR | 1LT | F30T12 | RAPID START | 36IN | 2-5/8IN | 1-3/4IN |
| LW130RL | 1LT | F30T12 | RAPID START | 36IN | 2-5/8IN | 1-3/4IN |
| LW134HR | 1LT | F34T12 | RAPID START | 48IN | 2-5/8IN | 1-3/4IN |
| LW134RL | 1LT | F34T12 | RAPID START | 48IN | 2-5/8IN | 1-3/4IN |
| LW134-2R | 1LT TANDEM | F34T12 | RAPID START | 96IN | 2-5/8IN | 1-3/4IN |
| LW230R | 2LT | F30T12 | RAPID START | 36IN | 5IN | 2-1/8IN |
| LW234R | 2LT | F34T12 | RAPID START | 48IN | 5IN | 2-1/8IN |
| LW434R | 4LT | F34T12 | RAPID START | 48IN | 10IN | 2-1/8IN |

| ENERGY SAVING FLUORESCENT FIXTURES T8 ELECTRONIC | | | | | | |
|---|------------|-----------|---------------|------------|---------|---------|
| MODEL NO. | QTY | LAMP TYPE | | DIMENSIONS | | |
| | | | | L | W | D |
| E-LW117 | 1LT | F17T8 | INSTANT START | 24IN | 2-5/8IN | 1-3/4IN |
| E-LW125 | 1LT | F25T8 | INSTANT START | 36IN | 2-5/8IN | 1-3/4IN |
| E-LW132 | 1LT | F32T8 | INSTANT START | 48IN | 2-5/8IN | 1-3/4IN |
| E-LW132-2 | 1LT TANDEM | F32T8 | INSTANT START | 96IN | 2-5/8IN | 1-3/4IN |
| E-LW217 | 2LT | F17T8 | INSTANT START | 24IN | 5IN | 2-1/8IN |
| E-LW2232 | 2LT TANDEM | F32T8 | INSTANT START | 96IN | 5IN | 2-1/8IN |
| E-LW225 | 2LT | F25T8 | INSTANT START | 36IN | 5IN | 2-1/8IN |
| E-LW232 | 2LT | F32T8 | INSTANT START | 48IN | 5IN | 2-1/8IN |
| E-LW432 | 4LT | F32T8 | INSTANT START | 48IN | 10IN | 2-1/8IN |
| E-LW496-T12 | 4LT | F96T12 | INSTANT START | 96IN | 10IN | 3-1/8IN |
| E-LW496-T8 | 4LT | F96T8 | INSTANT START | 96IN | 10IN | 3-1/8IN |

AVAILABLE ADDERS/OPTIONS (Some may be special order, please inquire at factory)

- 277 volt
- Cord & plug (2 or 3 wire)
- Dimming ballast
- Emergency back-up
- Pull chain switch
- Stems (3/8in diameter)
- Zero degree ballast



APOLLO LIGHTING
 212 SOUTH 12th AVENUE
 MOUNT VERNON, NEW YORK 10550
 914-664-3600 Phone 914-664-6091 Fax