


3G SERIES

DEEP RECESSED LAY-IN FIXTURE

- For drop / T-bar ceilings
- Pre-finished 23 ga steel in a baked white enamel
- UL listed for dry locations
- 3in deep aluminum parabolic louver included (standard cells only - see adders for custom cells)

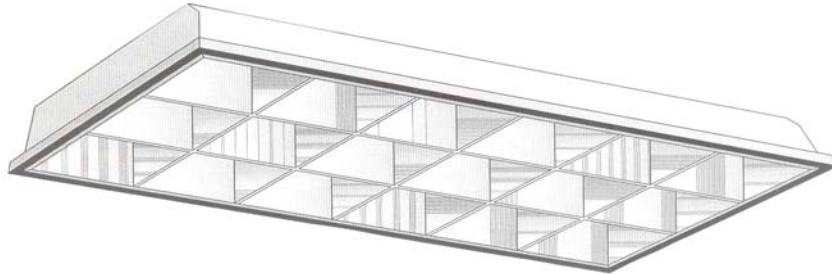

Dimensions subject to change, inquire at factory for latest data



ENERGY SAVING FLUORESCENT FIXTURES T12 MAGNETIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
3G22P3D9234	2ULT	F34T12	RAPID START	23-3/4IN	23-3/4IN	5-3/4IN
3G24P3D18234R	2LT	F34T12	RAPID START	47-3/4IN	23-3/4IN	5-3/4IN
3G24P3D18334R	3LT	F34T12	RAPID START	47-3/4IN	23-3/4IN	5-3/4IN
3G24P3D18434R	4LT	F34T12	RAPID START	47-3/4IN	23-3/4IN	5-3/4IN

ENERGY SAVING FLUORESCENT FIXTURES T8 ELECTRONIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
3GE22P3D9217	2LT	F17T8	INSTANT START	23-3/4IN	23-3/4IN	5-3/4IN
3GE22P3D9232	2ULT	F32T8	INSTANT START	23-3/4IN	23-3/4IN	5-3/4IN
3GE22P3D9317	3LT	F17T8	INSTANT START	23-3/4IN	23-3/4IN	5-3/4IN
3GE22P3D9417	4LT	F17T8	INSTANT START	23-3/4IN	23-3/4IN	5-3/4IN
3GE24P3D18232	2LT	F32T8	INSTANT START	47-3/4IN	23-3/4IN	5-3/4IN
3GE24P3D18332	3LT	F32T8	INSTANT START	47-3/4IN	23-3/4IN	5-3/4IN
3GE24P3D18432	4LT	F32T8	INSTANT START	47-3/4IN	23-3/4IN	5-3/4IN

AVAILABLE ADDERS/OPTIONS (Some may be special order, please inquire at factory)

- 277 volt
- Dimming ballast
- Emergency back-up
- Lamped & Whipped
- Various cell configurations available
- 20 ga steel (add suffix 2)
- Zero degree ballast

