


CON SERIES**SURFACE MOUNTED CONCEPT LIGHTING**

- Ideal for flush mounting
- Pre-finished 20 ga welded steel in a baked white enamel
- UL listed for dry locations
- Smooth square-cornered opal acrylic included



Dimensions subject to change, inquire at factory for latest data

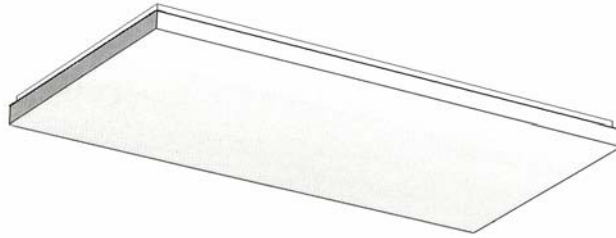

| ENERGY SAVING FLUORESCENT FIXTURES T12 MAGNETIC | | | | | | |
|--|------|-----------|-------------|------------|----------|---------|
| MODEL NO. | QTY | LAMP TYPE | | DIMENSIONS | | |
| | | | | L | W | D |
| CON1X4234-W | 2LT | F34T12 | RAPID START | 48IN | 10-5/8IN | 4-5/8IN |
| CON1X4434-W | 4LT | F34T12 | RAPID START | 48IN | 10-5/8IN | 4-5/8IN |
| CON2X2234-W | 2ULT | F34T12U | RAPID START | 24IN | 22-1/2IN | 4-5/8IN |
| CON2X2420I-W | 4LT | F20T12 | PRE-HEAT | 24IN | 22-1/2IN | 4-5/8IN |
| CON2X4234-W | 2LT | F34T12 | RAPID START | 48IN | 22-1/2IN | 4-5/8IN |
| CON2X4434-W | 4LT | F34T12 | RAPID START | 48IN | 22-1/2IN | 4-5/8IN |

| ENERGY SAVING FLUORESCENT FIXTURES T8 ELECTRONIC | | | | | | |
|---|------|-----------|---------------|------------|----------|---------|
| MODEL NO. | QTY | LAMP TYPE | | DIMENSIONS | | |
| | | | | L | W | D |
| E-CON1X4232-W | 2LT | F32T8 | INSTANT START | 48IN | 10-5/8IN | 4-5/8IN |
| E-CON1X4432-W | 4LT | F32T8 | INSTANT START | 48IN | 10-5/8IN | 4-5/8IN |
| E-CON2X2232-W | 2ULT | F32T8U | INSTANT START | 24IN | 22-1/2IN | 4-5/8IN |
| E-CON2X2417-W | 4LT | F17T8 | INSTANT START | 24IN | 22-1/2IN | 4-5/8IN |
| E-CON2X4232-W | 2LT | F32T8 | INSTANT START | 48IN | 22-1/2IN | 4-5/8IN |
| E-CON2X4432-W | 4LT | F32T8 | INSTANT START | 48IN | 22-1/2IN | 4-5/8IN |

AVAILABLE ADDERS/OPTIONS (Some may be special order, please inquire at factory)

- 277 volt
- 3X3 and 4X4 sizes available
- Black body (use suffix **-B**, instead of -W)
- Dimming ballast
- Emergency back-up
- Smooth soft cornered opal acrylic puff cloud (add suffix **-PC**)



APOLLO LIGHTING
 212 SOUTH 12th AVENUE
 MOUNT VERNON, NEW YORK 10550
 914-664-3600 Phone 914-664-6091 Fax