


MANE SERIES

STANDARD SURFACE BOX

- Ideal for flush mounting
- Post-finished 21 ga welded steel in a baked white enamel
- UL listed for dry locations
- Door frame & clear prismatic acrylic included

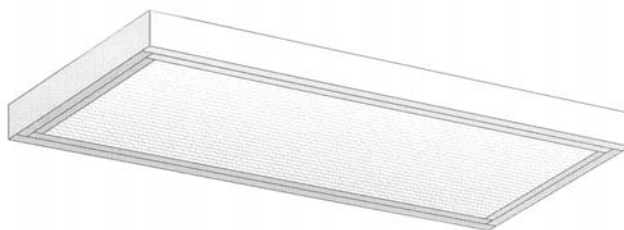

Dimensions subject to change, inquire at factory for latest data



ENERGY SAVING FLUORESCENT FIXTURES T12 MAGNETIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
MANE234R	2LT	F34T12	RAPID START	48-3/8IN	24-3/8IN	3-1/2IN
MANE334R	3LT	F34T12	RAPID START	48-3/8IN	24-3/8IN	3-1/2IN
MANE434R	4LT	F34T12	RAPID START	48-3/8IN	24-3/8IN	3-1/2IN

ENERGY SAVING FLUORESCENT FIXTURES T8 ELECTRONIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
E-MANE232	2LT	F32T8	INSTANT START	48-3/8IN	24-3/8IN	3-1/2IN
E-MANE332	3LT	F32T8	INSTANT START	48-3/8IN	24-3/8IN	3-1/2IN
E-MANE432	4LT	F32T8	INSTANT START	48-3/8IN	24-3/8IN	3-1/2IN

AVAILABLE ADDERS/OPTIONS (Some may be special order, please inquire at factory)

- 1/2in X 1/2in X 1/2in silver plated plastic louver (IE: MANPFL 432)
- 1-1/2in X 1-1/2in X 1in deep silver plated plastic louver (IE: MANDPFL 432)
- 1-1/2in deep aluminum parabolic louver (IE: MANP1D18432)
- 277 volt
- .125 prismatic acrylic lense
- Dimming ballast
- Emergency back-up

