


## PL / SPL SERIES


### BATHROOM LIGHTING

- Ideal for flush mounting
- Chrome plated steel
- UL listed for dry locations
- Ribbed opal acrylic included

#### PL STYLE

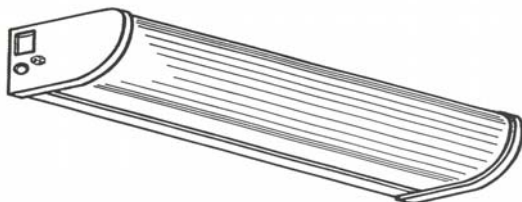

#### SPL STYLE

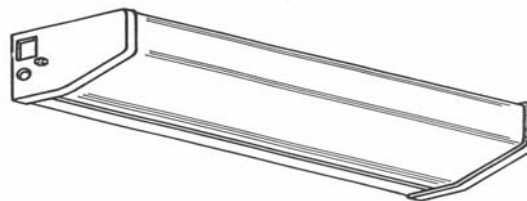

Dimensions subject to change, inquire at factory for latest data



| ENERGY SAVING FLUORESCENT FIXTURES<br>T12 MAGNETIC |     |           |             |            |          |          |
|--|-----|-----------|-------------|------------|----------|----------|
| MODEL NO.  | QTY | LAMP TYPE |             | DIMENSIONS |          |          |
|  |     |           |             | L          | W        | D        |
| PL215I   | 2LT | F15T12    | PRE-HEAT    | 18-1/4IN   | 3-3/16IN | 5-3/16IN |
| PL220I   | 2LT | F20T12    | PRE-HEAT    | 24-1/4IN   | 3-3/16IN | 5-3/16IN |
| PL230R   | 2LT | F30T12    | RAPID START | 36-1/4IN   | 3-3/16IN | 5-3/16IN |
| PL234R   | 2LT | F34T12    | RAPID START | 48-1/4IN   | 3-3/16IN | 5-3/16IN |

\* All available in 1lt

| ENERGY SAVING FLUORESCENT FIXTURES<br>T8 ELECTRONIC |     |           |               |            |          |          |
|---|-----|-----------|---------------|------------|----------|----------|
| MODEL NO.   | QTY | LAMP TYPE |               | DIMENSIONS |          |          |
|   |     |           |               | L          | W        | D        |
| E-PL217   | 2LT | F17T8     | INSTANT START | 24-1/4IN   | 3-3/16IN | 5-3/16IN |
| E-PL225   | 2LT | F25T8     | INSTANT START | 36-1/4IN   | 3-3/16IN | 5-3/16IN |
| E-PL232   | 2LT | F32T8     | INSTANT START | 48-1/4IN   | 3-3/16IN | 5-3/16IN |

\* All available in 1lt

#### AVAILABLE ADDERS/OPTIONS (Some may be special order, please inquire at factory)

- 3 Wire convenience outlet
- Baked white enamel finish (add suffix **-W**)
- Emergency back-up
- Rotary switch
- Smooth rounded opal acrylic for PL Series (add suffix **-R**)
- Smooth square opal acrylic for SPL Series (add suffix **-S**)



**APOLLO LIGHTING**  
 212 SOUTH 12th AVENUE  
 MOUNT VERNON, NEW YORK 10550  
 914-664-3600 Phone 914-664-6091 Fax