


COR SERIES

CORRIDOR LIGHTING

- Ideal for flush or row mounting
- Pre-finished 22 ga steel in a baked white enamel
- UL listed for dry locations

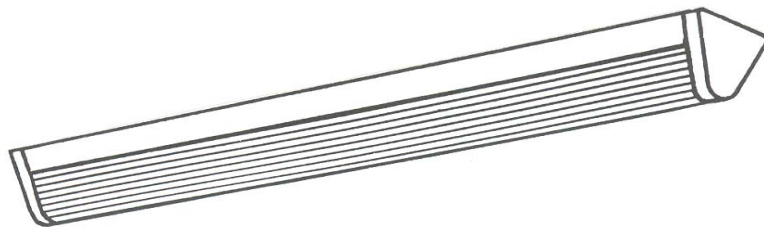

Dimensions subject to change, inquire at factory for latest data



ENERGY SAVING FLUORESCENT FIXTURES T12 MAGNETIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
COR120I	1LT	F20T12	PRE-HEAT	24IN	4-5/8IN	4-1/2IN
COR130RL	1LT	F30T12	RAPID START	36IN	4-5/8IN	4-1/2IN
COR134RL	1LT	F34T12	RAPID START	48IN	4-5/8IN	4-1/2IN
COR134-2R	1LT TANDEM	F34T12	RAPID START	96IN	4-5/8IN	4-1/2IN
COR196	1LT	F96T12	INSTANT START	96IN	4-5/8IN	4-1/2IN

ENERGY SAVING FLUORESCENT FIXTURES T8 ELECTRONIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
E-COR117	1LT	F17T8	INSTANT START	24IN	4-5/8IN	4-1/2IN
E-COR125	1LT	F25T8	INSTANT START	36IN	4-5/8IN	4-1/2IN
E-COR132	1LT	F32T8	INSTANT START	48IN	4-5/8IN	4-1/2IN
E-COR132-2	1LT TANDEM	F32T8	INSTANT START	96IN	4-5/8IN	4-1/2IN
E-COR196-T8	1LT	F96T8	INSTANT START	96IN	4-5/8IN	4-1/2IN

AVAILABLE ADDERS/OPTIONS (Some may be special order, please inquire at factory)

- 277 volt
- Emergency back-up
- Zero degree ballast



APOLLO LIGHTING
 212 SOUTH 12th AVENUE
 MOUNT VERNON, NEW YORK 10550
 914-664-3600 Phone 914-664-6091 Fax