


SPEC SERIES

WRAP-AROUND

- Ideal for flush, stem or row mounting
- Pre-finished 23 ga steel in a baked white enamel
- UL listed for dry locations
- Clear prismatic acrylic with linear sides included

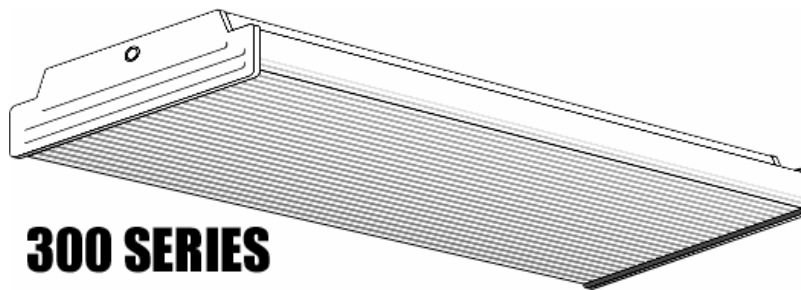

Dimensions subject to change, inquire at factory for latest data



ENERGY SAVING FLUORESCENT FIXTURES T12 MAGNETIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
SPEC220I	2LT	F20T12	PRE-HEAT	24IN	11-5/16IN	3-3/8IN
SPEC234R	2LT	F34T12	RAPID START	48IN	11-5/16IN	3-3/8IN
*SPEC296	2LT	F96T12	INSTANT START	96IN	11-5/16IN	3-3/8IN
SPEC2234R	2LT TANDEM	F34T12	RAPID START	96IN	11-5/16IN	3-3/8IN
SPEC420I	4LT	F20T12	PRE-HEAT	24IN	16IN	3-3/8IN
SPEC434R	4LT	F34T12	RAPID START	48IN	16IN	3-3/8IN
*SPEC496	4LT	F96T12	INSTANT START	96IN	16IN	3-3/8IN
SPEC2434R	4LT TANDEM	F34T12	RAPID START	96IN	16IN	3-3/8IN

* Also available in T12 ELE (EX: E-SPEC234R)

ENERGY SAVING FLUORESCENT FIXTURES T8 ELECTRONIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
E-SPEC217	2LT	F17T8	INSTANT START	24IN	11-5/16IN	3-3/8IN
E-SPEC232	2LT	F32T8	INSTANT START	48IN	11-5/16IN	3-3/8IN
E-SPEC296	2LT	F96T8	INSTANT START	96IN	11-5/16IN	3-3/8IN
E-SPEC2232	2LT TANDEM	F32T8	INSTANT START	96IN	11-5/16IN	3-3/8IN
E-SPEC417	4LT	F17T8	INSTANT START	24IN	16IN	3-3/8IN
E-SPEC432	4LT	F32T8	INSTANT START	48IN	16IN	3-3/8IN
E-SPEC496	4LT	F96T8	INSTANT START	96IN	16IN	3-3/8IN
E-SPEC2432	4LT TANDEM	F32T8	INSTANT START	96IN	16IN	3-3/8IN

AVAILABLE ADDERS/OPTIONS (Some may be special order, please inquire at factory)

- 277 volt
- Cord & plug (2 or 3 wire)
- Custom made chrome reflector (8ft requires four 4ft sections)
- Dimming ballast
- Emergency back-up
- Pull chain switch
- Smooth opal acrylic (add suffix **-OA**)
- Stems (3/8in diameter)
- Zero degree ballast



APOLLO LIGHTING
 212 SOUTH 12th AVENUE
 MOUNT VERNON, NEW YORK 10550
 914-664-3600 Phone 914-664-6091 Fax