


SPECN SERIES**NARROW WRAP-AROUND**

- Ideal for flush, stem or row mounting
- Pre-finished 22 ga steel in a baked white enamel
- UL listed for dry locations
- Clear prismatic acrylic with linear sides included



Dimensions subject to change, inquire at factory for latest data

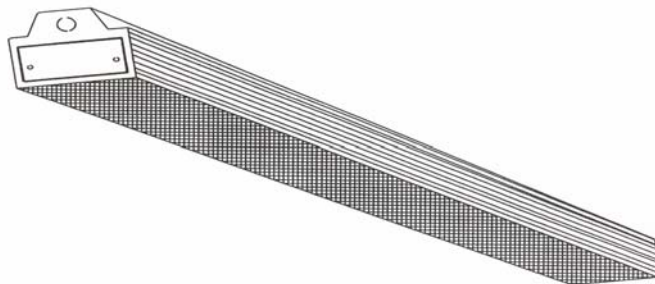

ENERGY SAVING FLUORESCENT FIXTURES T12 MAGNETIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
SPECN120I	1LT	F20T12	PRE-HEAT	24IN	5-5/8IN	4-5/8IN
SPECN220I	2LT	F20T12	PRE-HEAT	24IN	5-5/8IN	4-5/8IN
SPECN134R	1LT	F34T12	RAPID START	48IN	5-5/8IN	4-5/8IN
SPECN234R	2LT	F34T12	RAPID START	48IN	5-5/8IN	4-5/8IN
SPECN134-2R	1LT TANDEM	F34T12	RAPID START	96IN	5-5/8IN	4-5/8IN
SPECN2234R	2LT TANDEM	F34T12	RAPID START	96IN	5-5/8IN	4-5/8IN

ENERGY SAVING FLUORESCENT FIXTURES T8 ELECTRONIC						
MODEL NO.	QTY	LAMP TYPE		DIMENSIONS		
				L	W	D
E-SPECN117	1LT	F17T8	INSTANT START	24IN	5-5/8IN	4-5/8IN
E-SPECN217	2LT	F17T8	INSTANT START	24IN	5-5/8IN	4-5/8IN
E-SPECN132	1LT	F32T8	INSTANT START	48IN	5-5/8IN	4-5/8IN
E-SPECN232	2LT	F32T8	INSTANT START	48IN	5-5/8IN	4-5/8IN
E-SPECN132-2	1LT TANDEM	F32T8	INSTANT START	96IN	5-5/8IN	4-5/8IN
E-SPECN2232	2LT TANDEM	F32T8	INSTANT START	96IN	5-5/8IN	4-5/8IN

AVAILABLE ADDERS/OPTIONS (Some may be special order, please inquire at factory)

- 277 volt
- 3ft & 3ft tandem sizes available
- Cord & plug (2 or 3 wire)
- Custom made chrome reflector (8ft requires four 4ft sections)
- Dimming ballast
- Emergency back-up
- Pull chain switch
- Stems (3/8in diameter)
- Zero degree ballast

